

Badal C. Saha

Hemicellulose bioconversion

Received: 17 December 2002 / Accepted: 17 February 2003 / Published online: 16 April 2003
© Society for Industrial Microbiology 2003

Abstract Various agricultural residues, such as corn fiber, corn stover, wheat straw, rice straw, and sugarcane bagasse, contain about 20–40% hemicellulose, the second most abundant polysaccharide in nature. The conversion of hemicellulose to fuels and chemicals is problematic. In this paper, various pretreatment options as well as enzymatic saccharification of lignocellulosic biomass to fermentable sugars is reviewed. Our research dealing with the pretreatment and enzymatic saccharification of corn fiber and development of novel and improved enzymes such as endo-xylanase, β -xylosidase, and α -L-arabinofuranosidase for hemicellulose bioconversion is described. The barriers, progress, and prospects of developing an environmentally benign bioprocess for large-scale conversion of hemicellulose to fuel ethanol, xylitol, 2,3-butanediol, and other value-added fermentation products are highlighted.

Keywords Hemicellulose · Arabinoxylan · Bioconversion · Hemicellulase · Xylanolytic enzymes

Introduction

Hemicelluloses, the second most common polysaccharides in nature, represent about 20–35% of lignocellulosic biomass. Xylans are the most abundant hemicelluloses. In recent years, bioconversion of hemicellulose has received much attention because of its practical applications in various agro-industrial processes, such as efficient conversion of hemicellulosic

biomass to fuels and chemicals, delignification of paper pulp, digestibility enhancement of animal feedstock, clarification of juices, and improvement in the consistency of beer [134, 139, 144]. Enzymes that degrade, or help to degrade, hemicellulose are of great interest to the paper and pulp industry due to their bleach-boosting properties (biobleaching of pulp), which reduces environmentally unfriendly chlorine consumption [91, 135]. Cellulase-free xylanase can facilitate lignin removal from paper pulp without any harmful effect. The utilization of hemicellulosic sugars is essential for efficient conversion of lignocellulosic materials to fuel ethanol and other value-added fermentation products. Xylan-degrading enzymes hold great promise in saccharifying various pretreated agricultural and forestry residues to fermentable sugars. Other potential applications of hemicellulases include biopulping of wood, coffee processing, fruit and vegetable maceration, and preparation of high fiber baked goods [19]. In addition, xylan-degrading enzymes play a great role in elucidating the structures of complex xylans. In this article, a brief review on the bioconversion of hemicellulose—particularly arabinoxylans present in various agricultural residues—to fuel ethanol, xylitol and 2,3-butanediol, is presented.

Structure of hemicellulose

Hemicelluloses are heterogeneous polymers of pentoses (xylose, arabinose), hexoses (mannose, glucose, galactose), and sugar acids. Unlike cellulose, hemicelluloses are not chemically homogeneous. Hardwood hemicelluloses contain mostly xylans, whereas softwood hemicelluloses contain mostly glucomannans [84]. Xylans of many plant materials are heteropolysaccharides with homopolymeric backbone chains of 1,4-linked β -D-xylopyranose units. Besides xylose, xylans may contain arabinose, glucuronic acid or its 4-O-methyl ether, and acetic, ferulic, and *p*-coumaric acids. The frequency and composition of branches are dependent on the source of xylan [1]. The backbone consists of *O*-acetyl, α -L-

B. C. Saha (✉)
Fermentation Biotechnology Research Unit, National Center for
Agricultural Utilization Research, Agricultural Research Service,
U. S. Department of Agriculture, 1815 North University Street,
Peoria, IL 61604, USA
E-mail: sahabc@ncaur.usda.gov
Tel.: +1-309-6816276
Fax: +1-309-6816427

arabinofuranosyl, α -1,2-linked glucuronic or 4-*O*-methylglucuronic acid substituents. However, unsubstituted linear xylans have also been isolated from guar seed husk, esparto grass, and tobacco stalks [35]. Xylans can thus be categorized as linear homoxylan, arabinoxylan, glucuronoxylan, and glucuronoarabinoxylan.

Xylans from different sources, such as grasses, cereals, softwood, and hardwood, differ in composition. Birch wood (Roth) xylan contains 89.3% xylose, 1% arabinose, 1.4% glucose, and 8.3% anhydrouronic acid [68]. Rice bran neutral xylan contains 46% xylose, 44.9% arabinose, 6.1% galactose, 1.9% glucose, and 1.1% anhydrouronic acid [126]. Wheat arabinoxylan contains 65.8% xylose, 33.5% arabinose, 0.1% mannose, 0.1% galactose, and 0.3% glucose [51]. Corn fiber xylan is one of the complex heteroxylans containing β -(1,4)-linked xylose residues [117]. It contains 48–54% xylose, 33–35% arabinose, 5–11% galactose, and 3–6% glucuronic acid [31]. About 80% of the xylan backbone is highly substituted with monomeric side-chains of arabinose or glucuronic acid linked to *O*-2 and/or *O*-3 of xylose residues, and also by oligomeric side chains containing arabinose, xylose, and sometimes galactose residues (Fig. 1) [122]. A model for the corn fiber cell wall is shown in Fig. 2 [121]. The heteroxylans, which are highly cross-linked by diferulic bridges, constitute a network in which the cellulose microfibrils may be imbedded. Structural wall proteins might be cross-linked together by isodityrosine bridges and with feruloylated heteroxylans, thus forming an insoluble network [60]. In softwood heteroxylans, arabinofuranosyl residues are esterified with *p*-coumaric acids and ferulic acids [88]. In hardwood xylans, 60–70% of the xylose residues are acetylated [131]. The degree of polymerization of hardwood xylans (150–200) is higher than that of softwoods (70–130).

Fig. 1 Schematic structure of corn fiber heteroxylan. Reprinted from [122], with permission from Elsevier, Amsterdam

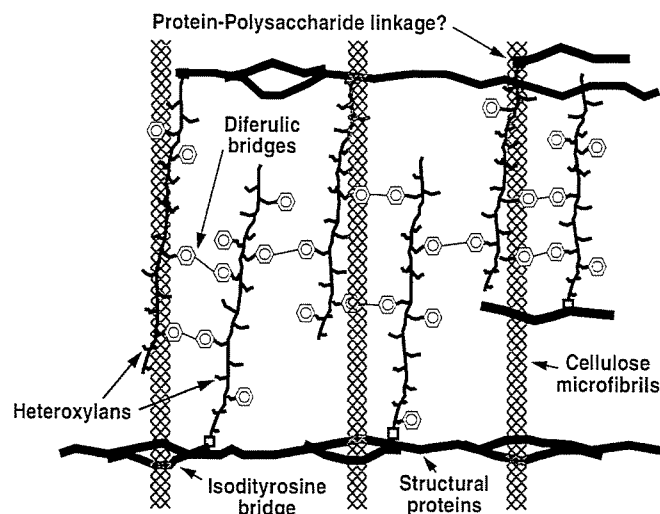
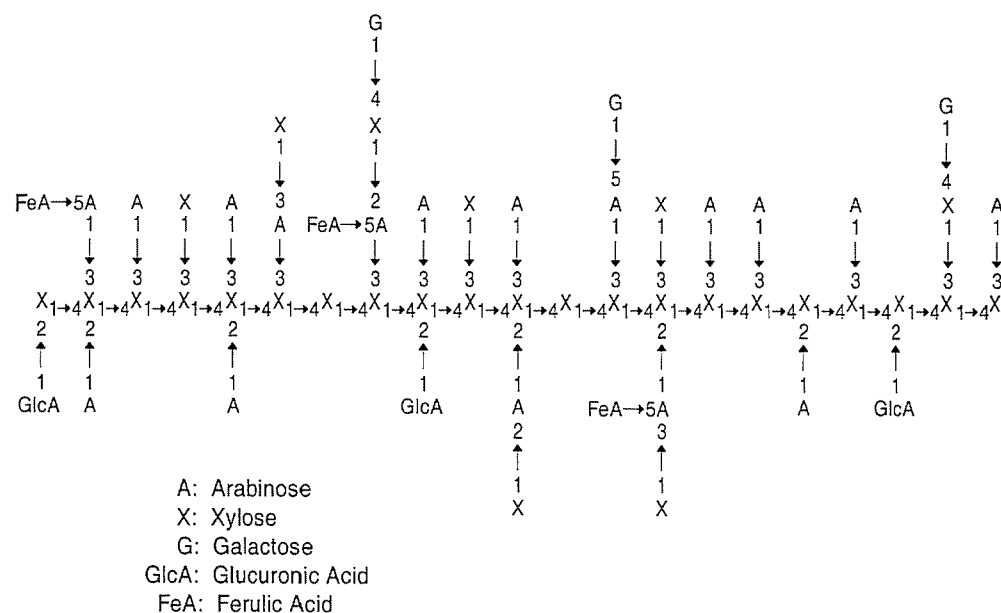


Fig. 2 Model for corn fiber cell walls. Reprinted from [121], with permission from John Wiley & Sons on behalf of SCI

Pretreatment of hemicellulose

Lignocellulosic biomass includes various agricultural residues (straws, hulls, stems, stalks), deciduous and coniferous woods, municipal solid wastes, waste from the pulp and paper industry, and herbaceous energy crops. The compositions of these materials vary. The major component is cellulose (35–50%), followed by hemicellulose (20–35%) and lignin (10–25%). Table 1 gives the composition of some lignocellulosics. Proteins, oils, and ash make up the remaining fraction of lignocellulosic biomass [140]. The structure of these materials is very complex, and native biomass is generally resistant to an enzymatic hydrolysis. In the current model of the structure of lignocellulose, cellulose fibers are embedded in a lignin-polysaccharide matrix.

Table 1 Composition of some agricultural lignocellulosic biomass

	Composition (%, dry basis)		
	Cellulose	Hemicellulose	Lignin
Corn fiber ^a	15	35	8
Corn cob	45	35	15
Corn stover	40	25	17
Rice straw	35	25	12
Wheat straw	30	50	20
Sugarcane bagasse	40	24	25
Switchgrass	45	30	12
Coastal bermuda grass	25	35	6

^a Contains 20% starch

Xylan may play a significant role in the structural integrity of cell walls by both covalent and non-covalent associations [130].

The pretreatment of lignocellulosic biomass is crucial before enzymatic hydrolysis. Various pre-treatment options are available now to fractionate, solubilize, hydrolyze and separate cellulose, hemicellulose, and lignin components [8, 21, 137, 141]. These include concentrated acid [45], dilute acid [117], alkaline [71], SO₂ [17], hydrogen peroxide [48], steam explosion (autohydrolysis) [40], ammonia fiber explosion (AFEX) [22], wet-oxidation [123], lime [64], liquid hot water [73], CO₂ explosion [21], and organic solvent treatments [15]. In each option, the biomass is reduced in size and its physical structure is opened. Two categories of dilute acid pretreatments are used: high temperature (>160°C) continuous-flow for low solids loading (5–10%, w/w) and low temperature (<160°C) batch process for high solids loading (10–40%, w/w) [128]. Dilute acid pretreatment at high temperature usually hydrolyzes hemicellulose to its sugars (xylose, arabinose and other sugars), which are water soluble [8]. The residue contains cellulose and often much of the lignin. The lignin can be extracted with solvents such as ethanol, butanol, or formic acid. Alternatively, hydrolysis of cellulose with lignin present produces water-soluble sugars and insoluble residues, which are lignin plus unreacted materials. The use of SO₂ as a catalyst during steam pretreatment results in the enzymatic accessibility of cellulose and enhanced recovery of the hemicellulose-derived sugars [7]. Steam pretreatment at 200–210°C with the addition of 1% SO₂ (w/w) was superior to other forms of pretreatment of willow [36]. A glucose yield of 95%, based on the glycan available in the raw material, was achieved. By steam explosion, optimal solubilization, and degradation of hemicellulose can generally be achieved by either high temperature and short residence time (270°C, 1 min) or lower temperature and longer residence time (190°C, 10 min) [33]. Morjanoff and Gray [87] reported that enzymatic saccharification of 100 g sugarcane bagasse after steam explosion with 1% H₂SO₄ at 220°C for 30 s at a water:solid ratio of 2:1 yielded 65.1 g sugar.

Super critical carbon dioxide explosion was effective for pretreatment of cellulosic materials before enzymatic

hydrolysis [65, 147]. Zheng et al. [148] compared CO₂ explosion with steam and ammonia explosion for pretreatment of sugarcane bagasse and found that CO₂ explosion was more cost-effective than ammonia explosion and did not cause the formation of inhibitory compounds, which could occur in steam explosion. Cao et al. [9] reported a pretreatment method that involves steeping of the lignocellulosic biomass (using corn cob as a model feedstock) in dilute NH₄OH at ambient temperature to remove lignin, acetate, and extractives. This is followed by a dilute acid treatment that readily hydrolyzes the hemicellulose fraction to simple sugars, primarily xylose. The residual cellulose fraction of biomass can then be enzymatically hydrolyzed to glucose. Kurakake et al. [72] pretreated sugarcane bagasse, corn husk, and switchgrass with ammonia water to enhance enzymatic hydrolysis. Garrote et al. [43] treated *Eucalyptus* wood substrates with water under selected operational conditions (autohydrolysis reaction) to obtain a liquid phase containing hemicellulose decomposition products (mainly acetylated xylooligosaccharides, xylose, and acetic acid). In a further acid-catalyzed step (posthydrolysis reaction), xylooligosaccharides were converted to xylose. The wet oxidation method can be used for fractionation of lignocellulosics into solubilized hemicellulose fraction and a solid cellulose fraction susceptible to enzymatic saccharification. Bjerre et al. [3] found that a combination of alkali and wet oxidation did not generate furfural and 5-hydroxymethyl furfural (HMF). Klinke et al. [67] characterized the degradation products from alkaline wet oxidation (water, sodium carbonate, oxygen, high temperature, and pressure) of wheat straw. Apart from CO₂ and water, carboxylic acids were the main degradation products from hemicellulose and lignin. Aromatic aldehyde formation was minimized by temperature control and the addition of alkali. Draude et al. [32] reported that oxygen delignification of kraft pulp removed up to 67% of the lignin from softwood pulp and improved the rate of, and yield from, enzymatic hydrolysis by up to 111% and 174%, respectively.

Phenolic compounds from lignin degradation, furan derivatives (furfural and HMF) from sugar degradation, and aliphatic acids (acetic acid, formic acid and levulinic acid) are considered to be fermentation inhibitors generated from pretreated lignocellulosic biomass [94]. Various methods for detoxification of the hydrolyzates have been developed [93]. These include treatment with ion-exchange resins, charcoal or the ligninolytic enzyme laccase, pre-fermentation with the filamentous fungus *Trichoderma reesei*, removal of non-volatile compounds, extraction with ether or ethyl acetate, and treatment with alkali (lime) or sulfite. Persson et al. [97] employed countercurrent flow supercritical fluid extraction to detoxify a dilute acid hydrolyzate of spruce prior to ethanol fermentation with baker's yeast. A summary of various pretreatment options is given in Table 2. Each pretreatment method offers distinct advantages and disadvantages.

Table 2 Methods for pretreatment of lignocellulosic biomass (taken from [112])

Method	Example
Thermo-mechanical Autohydrolysis	Grinding, milling, shearing, extruder Steam pressure, steam explosion, supercritical carbon dioxide explosion
Acid treatment	Dilute acid (H ₂ SO ₄ , HCl), concentrated acid (H ₂ SO ₄ , HCl)
Alkali treatment	Sodium hydroxide, ammonia, alkaline hydrogen peroxide
Organic solvents treatment	Methanol, ethanol, butanol, phenol

Enzymatic saccharification of hemicellulose

Total biodegradation of xylan requires endo- β -1,4-xy-lanase, β -xylosidase, and several accessory enzymes, such as α -L-arabinofuranosidase, α -glucuronidase, acetylxy-lan esterase, ferulic acid esterase, and *p*-coumaric acid esterase, which are necessary for hydrolyzing various substituted xylans. Table 3 lists the enzymes involved in the degradation of xylan and their modes of action. The endo-xy-lanase attacks the main chains of xylans, and β -xylosidase hydrolyzes xylooligosaccharides to xylose. The α -arabinofuranosidase and α -glucuronidase remove the arabinose and 4-*O*-methyl glucuronic acid substituents, respectively, from the xylan backbone. The esterases hydrolyze the ester linkages between xylose units of the xylan and acetic acid (acetylxy-lan esterase) or between arabinose side chain residues and phenolic acids, such as ferulic acid (ferulic acid esterase) and *p*-coumaric acid (*p*-coumaric acid esterase).

Many microorganisms, such as *Penicillium capsula-tum* and *Talaromyces emersonii*, possess complete xylan-degrading enzyme systems [41]. Bachmann and McCarthy [2] reported significant synergistic interaction among endo-xy-lanase, β -xylosidase, α -arabinofuranosidase, and acetylxy-lan esterase of the thermophilic actinomycete *Thermomonospora fusca*. Synergistic action between depolymerizing and side-group cleaving enzymes has been verified using acetylated xylan as a substrate [99]. Many xy-lanases do not cleave glycosidic bonds between xylose units that are substituted. The side chains must be cleaved before the xylan backbone can be

completely hydrolyzed [76]. On the other hand, several accessory enzymes only remove side chains from xy-looligosaccharides. These enzymes require a partial hydrolysis of xylan before the side chains can be cleaved [100]. Although the structure of xylan is more complex than cellulose and requires several different enzymes with different specificities for complete hydrolysis, the polysaccharide does not form tightly packed crystalline structures like cellulose and is, thus, more accessible to enzymatic hydrolysis [44].

Corn fiber, a byproduct of corn wet milling facilities, contains about 20% starch in addition to 15% cellulose and 35% hemicellulose [120]. Saha and Bothast [117] evaluated several pretreatments (hot water, alkali, and dilute acid) and enzymatic saccharification procedures for conversion of corn fiber starch, cellulose, and hemicellulose to fermentable sugars. Hot water pre-treatment (121°C, 1 h) facilitated the enzymatic sac-charification of starch and cellulose but not hemicellulose. Hydrolysis of corn fiber pretreated with alkali (10:1, w/w, 121°C, 3 h) with hemicellulase en-zymes gave similar results. The results indicate that there are no suitable commercial hemicellulase preparations that can hydrolyze corn fiber hemicellulose to mono-meric sugars efficiently. Hemicellulose and starch com-ponents were then converted to simple sugars by dilute acid pretreatment, and the residual cellulose component was converted to glucose using commercially available enzymes. The procedure involves pretreatment of corn fiber (15% solid, w/v) with dilute acid (0.5% H₂SO₄, v/v) at 121°C for 1 h, neutralization to pH 5.0, then saccharification of the pretreated corn fiber mate-rial with commercial cellulase and β -glucosidase prepa-rations. The yield of monomeric sugars from corn fiber was typically 85–100% of the theoretical yield. This procedure did not generate inhibitors such as furfural and HMF, which are generally considered inhibitors for fermentative microorganisms. Thus, dilute acid pre-treatment at a relatively low temperature to minimize the formation of inhibitory compounds, followed by enzymatic saccharification of the cellulosic portion, is an excellent workable process for generating fermentable sugars from corn fiber.

Leathers and Gupta [75] described a partial sac-charification of corn fiber using a crude enzyme prepa-

Table 3 Enzymes involved in the hydrolysis of complex heteroarabinoxylans (taken from [116])

Enzyme	Mode of action
Endo-xy-lanase	Hydrolyzes mainly interior β -1,4-xylose linkages of the xylan backbone
Exo-xy-lanase	Hydrolyzes β -1,4-xylose linkages releasing xylobiose
β -Xylosidase	Releases xylose from xylobiose and short chain xylooligosaccharides
α -Arabinofuranosidase	Hydrolyzes terminal nonreducing α -arabinofuranose from arabinoxylans
α -Glucuronidase	Releases glucuronic acid from glucuronoxylans
Acetylxy-lan esterase	Hydrolyzes acetylester bonds in acetyl xylans
Ferulic acid esterase	Hydrolyzes ferulylester bonds in xylans
<i>p</i> -Coumaric acid esterase	Hydrolyzes <i>p</i> -coumaryl ester bonds in xylans

ration from *Aureobasidium* sp. Christov et al. [14] showed that crude enzyme preparation from *Aureobasidium pullulans* was only partially effective in the removal of xylan from dissolving pulp. Saha [108, 110] isolated three fungal cultures (*Fusarium proliferatum* NRRL 26517, *Fusarium verticillioides* NRRL Y-26518, and *Mucor circinelloides* NRRL Y-26519) that had the capability to utilize corn fiber xylan as growth substrate after screening 132 soil samples surrounding decaying corn and wood. The crude enzyme preparations from these newly isolated cultures were able to degrade corn fiber xylan well but the purified endo-xylanases from two fungal cultures could not degrade corn fiber xylan. The purified β -xylosidase released xylose from xylobiose and other short-chain xylooligosaccharides [109]. A summary of the characteristics of purified endo-xylanase and β -xylosidase from *Fusarium verticillioides* NRRL 26518 is presented in Table 4. For effective hydrolysis of xylan substrates, a proper mix of endo-xylanase with several accessory enzymes is essential. β -Xylosidase was competitively inhibited by xylose with a K_i value of 6 mM [109]. It is thus essential that a xylose tolerant β -xylosidase is also developed in order to make enzymatic saccharification of any xylan substrate a commercial success.

Saha and Bothast [114] found that *A. pullulans* grown on oat spelt xylan produced a highly thermostable novel extracellular α -L-arabinofuranosidase that had the ability to rapidly hydrolyze arabinan and debranched arabinan, and released arabinose from various arabinoxylans. The purified enzyme had a half-life of 8 h at 75°C and displayed optimal activity at 75°C and pH 4.0–4.5. The enzyme production was induced most by arabinose [115]. This indicates that arabinose-rich hemicellulose hydrolyzates can be used for production of the enzyme.

Production of fuel ethanol from hemicellulosic hydrolyzates

The utilization of hemicellulosic sugars is essential for efficient and cost-effective conversion of lignocellulosis

material to fuel ethanol. In 2002, over 2 billion gallons of ethanol was produced, mainly by fermenting corn starch. The demand for fuel ethanol is expected to rise very sharply as a safer alternative to methyl tertiary butyl ether (MTBE), the most common additive to gasoline used to provide cleaner combustion. MTBE has been found to contaminate groundwater.

Various waste and underutilized lignocellulosic agricultural residues can serve as low-cost feedstocks for production of fuel ethanol. Any hemicellulose containing lignocellulose generates a mixture of sugars upon pretreatment alone or in combination with enzymatic hydrolysis. The sugar mixture may contain any combination of xylose, arabinose, glucose, galactose, mannose, fucose and rhamnose depending on the source. Although traditional *Saccharomyces cerevisiae* and *Zymomonas mobilis* ferment glucose to ethanol rapidly and efficiently, they cannot ferment other sugars such as xylose and arabinose to ethanol. The yeasts *Pachysolen tannophilus*, *Pichia stipitis*, and *Candida shehate* have the capability to ferment xylose to ethanol [4, 124, 136]. Commercial exploitation of these yeasts for ethanol production from xylose is restricted mainly by their low ethanol tolerance, slow rates of fermentation, difficulty in controlling the rate of oxygen supply at the optimal level, plus sensitivity to inhibitors generated during pretreatment and hydrolysis of lignocellulosic substrates [34, 54]. However, xylose can be converted to xylulose using the enzyme xylose isomerase and traditional yeasts can ferment xylulose to ethanol [46, 53], although the process is not cost-effective. Arabinose, another pentose sugar, is often present in hemicellulosic hydrolyzate depending on the source. However, only a few yeast strains can, barely, ferment arabinose to ethanol [24, 111]. Thus, no naturally occurring yeast can ferment all these sugars to ethanol.

Some bacteria, such as *Escherichia coli*, *Klebsiella*, *Erwinia*, *Lactobacillus*, *Bacillus*, and *Clostridia*, can utilize mixed sugars but produce no, or only a limited quantity of, ethanol. These bacteria generally produce mixed acids (acetate, lactate, propionate, succinate, etc.) and solvents (acetone, butanol, 2,3-butanediol, etc.). Several microorganisms have been genetically

Table 4 Biochemical characteristics of purified xylanase and β -xylosidase from *Fusarium verticillioides* NRRL 26518 capable of utilizing corn fiber xylan (taken from [108,110])

Property	Xylanase	β -Xylosidase
Specific activity (U/mg protein)	492	57
Molecular weight	24,000	94,500
Isoelectric point (pI)	8.6	7.8
Optimum temperature	50°C	65°C
Optimum pH	5.5	4.5
Substrate	Xylan	Xylobiose and xylooligosaccharides
Product	Xylobiose and xylooligosaccharides	Xylose
Mode of action	Endo-acting	Exo-acting
K_m	9.5 mg/ml (oat spelt xylan, pH 5.0, 50°C)	0.85 mM (pNP- β -D-xyloside, pH 4.5, 50°C)
K_i (at pH 4.5, 50°C)		6.0 mM xylose
Metal ion requirement	None	None

engineered to overproduce ethanol from mixed sugar substrates by using two different approaches: (1) divert carbon flow from native fermentation products to ethanol in efficient mixed sugar utilizers such as *Escherichia*, *Erwinia*, and *Klebsiella*, and (2) introduce the pentose-utilizing capability into efficient ethanol producers such as *Saccharomyces* and *Zymomonas* [55, 58, 61, 145]. Various recombinant strains, e.g., *E. coli* K011, *E. coli* SL40, *E. coli* FBR3, *Zymomonas* CP4 (pZB5), and *Saccharomyces* 1400 (pLNH32), have been evaluated for fermentation of mixed sugar substrates and corn fiber hydrolyzates [5, 25, 26, 27, 28, 29, 62, 86]. These strains fermented corn fiber hydrolyzates to ethanol in the range of 21–34 g/l with yields ranging from 0.41–0.50 g ethanol per gram of sugar consumed [6]. Recently, Nichols et al. [89] constructed ethanologenic *E. coli* strains with a glucose phospho-transferase (*ptsG*) mutation. The *ptsG* mutants fermented mixed sugars—glucose, xylose, and arabinose—simultaneously rather than sequentially to ethanol with yields of 87–94%, i.e., similar to wild type. Martinez et al. [82] reported that increasing gene expression through the replacement of promoters and the use of a higher gene dosage (plasmids) substantially eliminated the apparent requirement for large amounts of complex nutrients of ethanologenic recombinant *E. coli* strain. Ethanol-tolerant mutants of recombinant *E. coli* have been developed that can produce up to 6% ethanol [142]. Recombinant *Z. mobilis*, into which four genes from *E. coli* [*xyIA* (xylose isomerase), *xyIB* (xylulokinase), *tal* (transaldolase) and *tktA* (transketolase)] were inserted, grew on xylose as the sole carbon source and produced ethanol at 86% of the theoretical yield [145]. Deng and Ho [23] demonstrated that phosphorylation is a vital step for metabolism of xylose through the pentose phosphate pathway (PPP). The gene *XKS1* (encoding xylulokinase) from *S. cerevisiae* and the heterologous genes from *XYL1* and *XYL2* (from *P. stipitis*) were inserted into a hybrid host, obtained by classical breeding of *Saccharomyces uvarum* and *Saccharomyces diastaticus*, which resulted in *Saccharomyces* strain pLNH32, capable of growing on xylose alone. Eliasson et al. [37] reported that chromosomal integration of a single copy of the *XYL1-XYL2-XYLS1* cassette in *S. cerevisiae* resulted in strain TMB3001. This strain attained specific uptake rates ($\text{g g}^{-1} \text{h}^{-1}$) of 0.47 and 0.21 for glucose and xylose, respectively, in continuous culture using a minimal medium. Recently, Sedlak and Ho [125] expressed genes [*araB* (L-ribulokinase), *araA* (L-arabinose isomerase) and *araD* (L-ribulose-5-phosphate)] from the *araBAD* operon encoding the arabinose-metabolizing genes from *E. coli* in *S. cerevisiae* but the transformed strain was not able to produce any detectable amount of ethanol from arabinose. Zhang et al. [146] constructed one strain of *Z. mobilis* (PZB301) with seven plasmid-borne genes encoding xylose- and arabinose-metabolizing genes and PPP genes. This recombinant strain was capable of fermenting both xylose and arabinose in a mixture of sugars with 82–84% theoretical yield in 80–100 h at 30°C. Richard et al. [102]

reported that overexpression all five enzymes (aldose reductase, L-arabinitol 4-dehydrogenase, L-xylulose reductase, xylitol dehydrogenase and xylulokinase) of the L-arabinose catabolic pathway in *S. cerevisiae* led to growth of *S. cerevisiae* on L-arabinose.

With much global research effort being directed towards developing a stable, ethanol-tolerant, robust recombinant ethanologenic organism capable of tolerating common fermentation inhibitors generated during pretreatment, competitive and economical production of fuel ethanol from hemicellulosic biomass holds strong promise.

Production of xylitol from hemicellulosic hydrolyzate

Xylitol, a five-carbon sugar alcohol, has attracted much attention because of its potential use as a natural food sweetener, a dental caries reducer, and a sugar substitute for diabetics [113]. It is currently produced by chemical reduction in alkaline conditions of the xylose derived mainly from wood hydrolyzate [81]. The recovery of xylitol from the xylan fraction is about 50–60% or 8–15% of the raw material employed [138]. The value depends on the xylan content of the raw material. Drawbacks of the chemical process are the requirements of high pressure (up to 50 atm) and temperature (80–140°C), use of an expensive catalyst (Raney-Nickel), and use of extensive separation and purification steps to remove the by-products, which are derived mainly from the hemicellulose hydrolyzate [85]. The bulk of xylitol produced is consumed in various food products such as chewing gum, candy, soft drinks, and ice cream. It gives a pleasant cool and fresh sensation due to its high negative heat of solution.

Production of xylitol by fermentation is becoming more attractive because of the problems associated with its chemical production. Many yeasts and mycelial fungi possess NADPH-dependent xylose reductase (EC 1.1.1.21), which catalyzes the reduction of xylose to xylitol as a first step in xylose metabolism [12]. Xylitol can be subsequently oxidized to xylulose by the action of xylitol dehydrogenase, which preferentially uses NAD as an acceptor [59]. In xylose-fermenting yeasts, the initial reactions of xylose metabolism appear to be rate-limiting [92]. This results in accumulation of xylitol in the culture medium, the degree varying with the culture conditions, and the yeast strain used [133]. A surplus of NADH during transient oxygen limitation inhibits the activity of xylitol dehydrogenase resulting in xylitol accumulation [50]. Some natural xylose-fermenting yeasts known to produce xylitol are: *Candida boidini*, *Candida guilliermondii*, *Candida tropicalis*, *Candida parapsilosis*, and *Debaryomyces hansenii* [113, 127].

Saha and Bothast [118] evaluated the ability of *Candida peltata* NRRL Y-6888 to ferment xylose to xylitol under different fermentation conditions such as pH, temperature, aeration, substrate concentration, and in the presence of glucose, arabinose, ethanol, methanol,

and organic acids. A maximum xylitol yield of 0.56 g/g xylose was obtained when the yeast was cultivated at pH 6.0, 28°C, and 200 rpm on 50 g/l xylose. The yeast produced ethanol (0.41 g/g in 40 h) from glucose (50 g/l) and arabitol (0.55 g/g in 87 h) from arabinose (50 g/l). It preferentially utilized glucose > xylose > arabinose from mixed substrates. Glucose (10 g/l), ethanol (7.5 g/l), and acetate (5 g/l) inhibited xylitol production by 61, 84, and 68%, respectively. Arabinose (10 g/l) had no inhibitory effect on xylitol production by the yeast. Saha and Bothast [111] also studied xylitol production from xylose and corn fiber acid hydrolyzate by two other yeasts (*Candida entomaea* NRRL Y-7785 and *Pichia guilliermondii* NRRL Y-2075). During the screening of 49 yeast strains capable of growing on arabinose, Saha and Bothast [111] observed that these two strains were superior secretors of arabitol as a major extracellular product of arabinose. Both strains produced about 0.70 g arabitol per gram arabinose.

Chen and Gong [11] studied the fermentation of sugarcane bagasse hemicellulose hydrolyzate to xylitol by a hydrolyzate-acclimatized yeast strain *Candida* sp. B-22. With this strain, a final xylitol concentration of 94.74 g/l was obtained from 105.35 g/l xylose in hemicellulose hydrolyzate after 96 h of incubation. *C. guilliermondii* FTI 20037 was able to ferment a sugar cane bagasse hydrolyzate producing 18.4 g/l xylitol from 29.5 g/l of xylose, at a production rate of 0.38 g l⁻¹ h⁻¹ [98]. This lower value, compared to that (0.66 g l⁻¹ h⁻¹) of the synthetic medium, may be attributed to the various toxic substances that interfere with microbial metabolism (e.g., acetic acid). Dominguez et al. [30] studied different treatments (neutralization, activated charcoal and neutralization, cation-exchange resins and neutralization) of sugar cane bagasse hemicellulose hydrolyzate to overcome the inhibitory effect on xylitol production by *Candida* sp. 11-2. The highest xylitol productivity (0.205 g l⁻¹ h⁻¹), corresponding to 10.54 g/l, was obtained from hydrolyzates treated with activated charcoal (initial xylose, 42.96 g/l). To obtain higher xylitol productivity, treated hydrolyzates were concentrated by vacuum evaporation in rotavapor to provide higher initial xylose concentration. The rate of xylitol production increased with increasing initial xylose concentration from 30 to 50 g/l, reaching a maximum of 28.9 g/l after 48 h fermentation. The decrease in xylitol production was dramatic with further increases in the initial xylose concentration. Parajo et al. [96] later reported a xylitol production of 39–41 g/l from concentrated *Eucalyptus globulus* wood acid hydrolyzate containing 58–78 g xylose/l by *D. hansenii* NRRL Y-7426 using an initial cell concentration of 50–80 g/l.

Roberto et al. [103, 104] tested hydrolyzed hemicellulosic fractions of sugar cane bagasse and rice straw for xylitol production in batch fermentation by *C. guilliermondii* under semi-aerobic condition and compared these with synthetic medium containing xylose. For all media tested, simultaneous utilization of hemicellulosic sugars (glucose and xylose) was observed, and the

highest substrate uptake rate was attained in sugar cane bagasse medium. Increased xylitol concentration (40 g/l) was achieved in synthetic and rice straw media, although the highest xylitol production rate was obtained in sugar cane bagasse hydrolyzate. They concluded that both hydrolyzates can be converted into xylitol with satisfactory yields and productivities. Roberto et al. [105, 106] evaluated xylitol production by *C. guilliermondii* in a rice straw hemicellulose hydrolyzate under different conditions of initial pH, nitrogen sources, and inoculum level. The xylitol yields were 0.68 g/g for the medium containing ammonium sulfate at pH 5.3 and 0.66 g/g with urea at pH 4.5. Under appropriate inoculum conditions, rice straw hemicellulose hydrolyzate was converted into xylitol by the yeast with efficiency values as high as 77% of the theoretical maximum. Mayerhoff et al. [83] evaluated 30 different yeast strains belonging to four different genera (*Candida*, *Debaryomyces*, *Hansenula* and *Pichia*) for xylitol production from rice straw hemicellulose hydrolyzate. The best performer was *Candida mogii* NRRL Y-17032, which yielded 0.65 g xylitol/g at 0.40 g l⁻¹ h⁻¹ over 75 h. Preziosi-Belloy et al. [101] investigated the production of xylitol from aspenwood hemicellulose hydrolyzate by *C. guilliermondii*. The hydrolyzate had to be supplemented with yeast extract, and the maximum xylitol yield (0.8 g/g) and productivity (0.6 g l⁻¹ h⁻¹) were reached by controlling oxygen input. Leathers and Dien [74] developed a two-stage sequential fermentation scheme for production of xylitol and arabitol from a mixture of sugars. Following glucose consumption, cells were removed from mixed sugar cultures and replaced with cells from cultures grown on xylose alone. In the second fermentation stage, xylose and arabinose were successfully fermented to xylitol and arabitol. Dilute acid hydrolyzates of corn fiber were suitable for the two-stage fermentation process, but only after treatment with a mixed-bed deionization resin. Cruz et al. [20] studied xylitol production from barley bran hydrolyzates by continuous fermentation with *Debaryomyces hansenii*. The optimum xylitol productivity (2.53 g l⁻¹ h⁻¹) was reached at a dilution of rate of 0.284/h with cell recycle after membrane separation. Xylitol was produced in a two-substrate (xylose, glucose) batch fermentation with cell recycling of *C. tropicalis* [13]. The optimized cell recycle fermentation resulted in xylitol yield of 0.823 g/g xylose with a productivity of 4.94 g l⁻¹ h⁻¹ and a final xylitol concentration of 189 g/l.

Carvalho et al. [10] obtained maximum xylitol concentration of 20.6 g/l with a volumetric productivity of 0.43 g l⁻¹ h⁻¹ and yield of 0.47 g/g after 48 h fermentation during batch xylitol production from concentrated sugarcane bagasse hydrolyzate and *C. guilliermondii* cells, immobilized in calcium-alginate beads. The production of xylitol from various hemicellulosic hydrolyzates is presented in Table 5. A number of recombinant *S. cerevisiae* strains have been created by expressing the xylose reductase gene (*XYLI*) from *P. stipitis* and *C. shehate* and production of xylitol from xylose by

Table 5 Xylitol production from detoxified hemicellulosic hydrolyzates by fermentation

Substrate	Yeast	Fermentation time (h)	Xylose (g/l)	Xylitol (g/l)	Xylitol (g/g)
Sugarcane bagasse [11]	<i>Candida</i> sp.B-22	96	105.4	96.8	0.89
Sugarcane bagasse [30]	<i>Candida</i> sp.11-2	48	42.96	10.54	
Sugarcane bagasse [98]	<i>Candida guilliermondii</i> FTI 20037		29.50	18.40	
Rice straw [106]	<i>C. guilliermondii</i> FTI 20037	72	64	37.6	0.62
Corn cob [66]	<i>Candida parapsilosis</i>	59	50	36	0.72
Wood [95]	<i>Debaryomyces hansenii</i> NRRL Y-7426	78	78	41	0.73
Hardwood [18]	<i>Pachysolen tannophilus</i>	96	89	39.5	

these recombinant strains in batch and fed batch fermentations have been investigated [16, 49, 56, 57, 77]. These strains converted xylose to xylitol with over 95% yield.

Gurgel et al. [52] studied xylitol recovery from fermented sugarcane bagasse hydrolyzate. The best clarifying treatment was found by adding 20 g activated carbon to 100 ml fermented broth at 80°C for 1 h at pH 6.0. The clarified medium was treated with ion-exchange resins after which xylitol crystallization was attempted. The ion exchange resins were not efficient but the crystallization technique showed good performance, although the crystals were involved in a viscous and colored solution. Recently, Faveri et al. [39] reported xylitol recovery by crystallization from synthetic solutions and fermented hemicellulose hydrolyzates. The method involves evaporation of dilute solution up to super saturation, cooling of the super saturated solution, separation of crystals by centrifugation and final filtration. Using two sets of tests on xylitol-xylose synthetic solutions and one set on fermented hardwood hemicellulose hydrolyzate, the best results in terms of either crystallization yield (0.56) or purity degree (1.00) were obtained with quite concentrated solutions of 730 g/l at relatively high temperature (−5°C). They concluded that xylitol separation by crystallization from fermented hemicellulose hydrolyzate is feasible.

Nidetzky et al. [90] studied continuous enzymatic production of xylitol with simultaneous coenzyme regeneration in a charged membrane reactor. An NADH-dependent xylose reductase from *Candida tenuis* catalyzed the reduction of xylose, which was coupled to enzymatic oxidation of glucose by glucose dehydrogenase from *Bacillus cereus* to make achievable an up to 10,000-fold regeneration of NADH per cycle of discontinuous conversion. Under suitable conditions, 300 g/l substrate could be converted in yields above 96% in one single batch reaction.

The demand for xylitol in the food and pharmaceutical industries as an alternative sweetener has created a strong market for the development of low cost xylitol production process. Various xylose-rich hemicellulosic materials can serve as abundant and cheap feedstocks for production of xylitol by fermentation. The cellulosic fraction can be converted to glucose, which is then fermented to fuel ethanol by conventional *S. cerevisiae*. Much research needs to be done to select a suitable

microorganism that can convert xylose into xylitol efficiently in the presence of other hemicellulosic sugars such as glucose, and to understand the regulation and optimization of xylitol production by fermentation. It is possible to introduce the pathway for conversion of arabinose to xylitol into xylitol-producing yeast. In that case, xylitol can be produced from both xylose and arabinose. There is strong interest in creating a recombinant yeast that can produce xylitol from glucose.

Production of 2,3-butanediol from hemicellulosic hydrolyzate

2,3-Butanediol, otherwise known as 2,3-butylene glycol (2,3-BD) is a valuable chemical feedstock because of its application as a solvent, liquid fuel, and as a precursor of many synthetic polymers and resins. With a heating value of 27,200 J/g, 2,3-BD compares favorably with ethanol (29,100 J/g) and methanol (22,100 J/g) for use as a liquid fuel and fuel additive [132]. Dehydration of 2,3-BD yields the industrial solvent methyl ethyl ketone, which is much more suited as a fuel because of its much lower boiling point. Further dehydration yields 1,3-butanediene, which is the starting material for synthetic rubber and is also an important monomer in the polymer industry [79]. During World War II, it was needed for conversion to 1,3-butanediene. Methyl ethyl ketone can be hydrogenated to yield high octane isomers suitable for high quality aviation fuels. Diacetyl, formed by catalytic dehydrogenation of the diol, is a highly valued food additive [80]. A wide variety of chemicals can also be easily prepared from 2,3-BD [47, 143]. There is interest in industrial scale production of 2,3-BD from various agricultural residues as well as from logging, pulp and paper, and food industry wastes [80].

2,3-BD can occur in two enantiomeric forms: D-(−) and L-(+) as well as an optically inactive meso-form. *Bacillus polymyxa* produces D-(−)2,3-BD whereas *Klebsiella pneumoniae* (*Aerobacter aerogenes*) produce meso-form and also some of the L-(+) form. *Bacillus subtilis*, *Serratia marcescens* and *Aerobacter hydrophila* produce mixtures of different forms [69]. Saha and Bothast [119] isolated *Enterobacter cloacae* NRRL B-23289 from local decaying wood/corn soil samples while screening for microorganisms for conversion of arabinose to fuel ethanol. The major product of fermentation

Table 6 Fermentation of various sugars by *Enterobacter cloacae* NRRL B-23289^a (taken from [119])

	Substrate (50 g/l)	Time (h)	Butanediol (g/l)	Acetoin (g/l)	Butanediol (g/g substrate)
	Glucose	63	18.6	3.1	0.37
	Xylose	63	18.9	3.7	0.38
	Arabinose	39	21.7	0.6	0.43
	Mixture A ^b	48	19.6	3.5	0.39
	Mixture B ^c	48	19.5	4.1	0.39
	Mannose	72	18.6	0	0.37
	Galactose	63	18.9	3.7	0.38
	Fructose	39	21.7	0.6	0.43
	Sucrose	48	17.7	2.4	0.35

^aAt pH 6.0, 30°C and 200 rpm

^bGlucose:xylose:arabinose (1:1:1)

^cGlucose:xylose:arabinose (1:2:1)

by the bacterium was meso-2,3-BD (Table 6). In a typical fermentation, a 2,3-BD yield of 0.43 g/g arabinose was obtained at an initial arabinose concentration of 50 g/l. The bacterium utilized sugars from acid plus enzyme saccharified corn fiber and produced 2,3-BD (0.35 g/g available sugars). It also produced 2,3-BD from dilute acid pretreated corn fiber acid by simultaneous saccharification and fermentation (0.34 g/g theoretical sugars). The 2,3-BD yield (0.35–0.43 g/g sugar) by the newly isolated *E. cloacae* NRRL B-23289 compares favorably with other 2,3-BD-producing organisms reported in the literature (0.30–0.45 g/g sugar) [79].

Butanediol is produced during oxygen-limited growth, by a fermentative pathway known as the mixed acid-butanediol pathway [70]. The 2,3-BD pathway and the relative proportions of acetoin and butanediol serve to maintain the intracellular NAD/NADH balance under changing culture conditions. The theoretical maximum yield of 2,3-BD from monosaccharides is 0.5 g/g [63]. The efficient biological conversion of all available sugars in agricultural biomass residues to fuels and chemicals is crucial to the efficiency of any process intended to compete economically with petrochemical products [143].

The high boiling point of 2,3-BD, its high affinity for water, and the dissolved and solid substances of the fermentation broth make it difficult for 2,3-BD to be purified and recovered from fermentation slurry [129]. Various methods, such as solvent extraction, liquid-liquid extraction and salting out, have been used to recover butanediol. Another feasible method to recover butanediol is countercurrent stream stripping [42].

Production of other value-added products from hemicellulose hydrolyzates

Lactic acid is used in the food, pharmaceutical, and cosmetic industries. It is a component of biodegradable plastic polylactate, the market for which is expected to grow significantly. Dien et al. [28] constructed recombinant *E. coli* carrying the lactate dehydrogenase gene from *Streptococcus bovis* on a low copy number plasmid for production of L-lactate. The recombinant strains (FBR 9 and FBR 11) produced 56–63 g L-lactic

acid from 100 g/l xylose at pH 6.7 and 35°C. The catabolic repression mutants (*ptsG*) of the recombinant *E. coli* strains have the ability to simultaneously ferment glucose and xylose [29]. The *ptsG*[−] strain FBR19 fermented 100 g sugar (glucose and xylose, 1:1) to 77 g lactic acid/l. This strain has great potential to be used for conversion of lignocellulosic substrates to lactic acid.

Ferulic acid is the major cinnamic acid found in a variety of plant cell walls. Corn fiber contains about 3% ferulic acid. Wheat bran is another source of ferulic acid (0.5–1%). Faulds et al. [38] developed a laboratory scale procedure to produce free ferulic acid (5.7 g) from wheat bran (1 kg) by using a *Trichoderma* xylanase preparation and *Aspergillus niger* ferulic acid esterase. Using filamentous fungi, a two-stage process for vanillin formation was developed in which a strain of *A. niger* was first used to convert ferulic acid to vanillic acid, which was then reduced to vanillin by a laccase-deficient strain of *Pycnoporus cinnabarinus* [78].

Concluding remarks

Conversion of hemicellulose into value-added useful products by enzymatic and/or fermentation routes holds strong promise for the use of a variety of unutilized and underutilized agricultural residues for practical purposes. Currently, the conversion of hemicellulosic substrates to fermentable sugars is problematic. Some of the emerging pretreatment methods, such as alkaline peroxide and AFEX, generate solubilized and partially degraded hemicellulosic biomass that needs to be treated further with enzymes or other means in order to produce fermentable sugars. With the development of a suitable pretreatment method, minimizing the formation of inhibitory compounds for fermentative organisms, and with the proper mix of hemicellulases (enzyme cocktail) tailored for each biomass conversion, this vast renewable resource can be utilized for production of fuels and chemicals by fermentation. Much research needs to be done to develop efficient and cost-effective pretreatment methods, enzymes for cellulose and hemicellulose conversion at an industrial scale, robust efficient microorganisms to ferment hemicellulosic sugars simultaneously in a cost-competitive way, and methods for cost-effective recovery of fermentation products.

References

- Aspinall GO (1980) Chemistry of cell wall polysaccharides. In: Preiss J (ed) The biochemistry of plants (a comprehensive treatise), vol 3. Carbohydrates: structure and function. Academic Press, New York, pp 473–500
- Bachmann SL, McCarthy AJ (1991) Purification and cooperative activity of enzymes constituting the xylan-degrading system of *Thermomonospora fusca*. Appl Environ Microbiol 57:2121–2130
- Bjerre AB, Olesen AB, Fernqvist T, Ploger A, Schmidt AS (1996) Pretreatment of wheat straw using combined wet oxidation and alkaline hydrolysis resulting in convertible cellulose and hemicellulose. Bioresour Technol 49:568–577
- Bothast RJ, Saha BC (1997) Ethanol production from agricultural biomass substrates. Adv Appl Microbiol 44:261–286
- Bothast RJ, Saha BC, Flossenzier AV, Ingram LO (1994) Fermentation of L-arabinose, D-xylose and D-glucose by ethanologenic *Escherichia coli*. Biotechnol Lett 16:401–406
- Bothast RJ, Nichols NN, Dien BS (1999) Fermentation with new recombinant organisms. Biotechnol Prog 15:867–875
- Brownell HH, Saddler JN (1984) Steam explosion pretreatment for enzymatic hydrolysis. Biotechnol Bioeng Symp 14:55–68
- Bungay H (1992) Product opportunities for biomass refining. Enzyme Microb Technol 14:501–507
- Cao NJ, Krishnan MS, Du JX, Gong CS, Ho NWY, Chen ZD, Tsao GT (1996) Ethanol production from corn cob pretreated by the ammonia steeping process using genetically engineered yeast. Biotechnol Lett 18:1013–1018
- Carvalho W, Silva SS, Converti A, Vitolo M (2002) Metabolic behavior of immobilized *Candida guilliermondii* cells during batch xylitol production from sugarcane bagasse acid hydrolyzate. Biotechnol Bioeng 79:165–169
- Chen LF, Gong CS (1985) Fermentation of sugarcane bagasse hemicellulose hydrolyzate to xylitol by a hydrolyzate-acclimatized yeast. J Food Sci 50:226–228
- Chiang C, Knight SG (1960) Xylose metabolism by cell-free extract of *Penicillium chrysosporium*. Nature 188:79–81
- Choi JH, Moon KH, Ryu YW, Seo JH (2000) Production of xylitol in cell recycle fermentations of *Candida tropicalis*. Biotechnol Lett 22:1625–1628
- Christov LP, Myburgh J, van Tonder A, Prior BA (1997) Hydrolysis of extracted and fiber-bound xylan with *Aureobasidium pullulans* enzymes. J Biotechnol 55:21–29
- Chum HL, Johnson DK, Black S (1988) Organosolv pretreatment for enzymatic hydrolysis of poplars: 1. enzyme hydrolysis of cellulosic residues. Biotechnol Bioeng 31: 643–649
- Chung YS, Kim MD, Lee WJ, Ryu YW, Kim JH, Seo JH (2002) Stable expression of xylose reductase gene enhances xylitol production in recombinant *Saccharomyces cerevisiae*. Enzyme Microb Technol 30:809–816
- Clark DP, Mackie KL (1987) Steam explosion of the softwood *Pinus radiata* with sulphur dioxide addition. 1. Process optimization. J Wood Chem Technol 7:373–403
- Converti A, Perego P, Dominguez JM (1999) Xylitol production from hardwood hemicellulose hydrolyzates by *Pachysolen tannophilus*, *Debaryomyces hansenii*, and *Candida guilliermondii*. Appl Biochem Biotechnol 82:141–151
- Coughlan MP, Hazlewood GP (1993) β -1,4-Xylan-degrading enzyme systems: biochemistry, molecular biology and applications. Biotechnol Appl Biochem 17:259–289
- Cruz JM, Dominguez JM, Parajo JC (2000) Xylitol production from barley bran hydrolyzates by continuous fermentation with *Debaryomyces hansenii*. Biotechnol Lett 22:1895–1898
- Dale BE, Moreira MJ (1982) A freeze-explosion technique for increasing cellulose hydrolysis. Biotechnol Bioeng Symp 12:31–43
- Dale BE, Leong CK, Pham TK, Esquivel VM, Rios L, Latimer VM (1996) Hydrolysis at low enzyme levels: application of the AFEX process. Bioresour Technol 56:111–116
- Deng XX, Ho NWY (1990) Xylulokinase activity in various yeasts including *Saccharomyces cerevisiae* containing the cloned xylulokinase gene. Appl Biochem Biotechnol 24/25:193–199
- Dien BS, Kurtzman CP, Saha BC, Bothast RJ (1996) Screening for L-arabinose fermenting yeasts. Appl Biochem Biotechnol 57/58:233–242
- Dien BS, Hespell RB, Ingram LO, Bothast RJ (1997) Conversion of corn milling fibrous coproducts into ethanol by recombinant *Escherichia coli* strains K011 and SL 40. World J Microbiol Biotechnol 13:619–625
- Dien BS, Iten LB, Bothast RJ (1999) Conversion of corn fiber to ethanol by recombinant *E. coli*. J Ind Microbiol Biotechnol 22:575–581
- Dien BS, Nichols NN, O'Bryan PJ, Bothast RJ (2000) Development of new ethanologenic *Escherichia coli* strains for fermentation of lignocellulosic biomass. Appl Biochem Biotechnol 84–86:181–196
- Dien BS, Nichols NN, Bothast RJ (2001) Recombinant *Escherichia coli* engineered for production of L-lactic acid from hexose and pentose sugars. J Ind Microbiol Biotechnol 27:259–264
- Dien BS, Nichols NN, Bothast RJ (2002) Fermentation of sugar mixtures using *Escherichia coli* catabolite repression mutants engineered for production of L-lactic acid. J Ind Microbiol Biotechnol 29:221–227
- Dominguez JM, Gong CS, Tsao GT (1996) Pretreatment of sugar cane bagasse hemicellulose hydrolyzate for xylitol production by yeast. Appl Biochem Biotechnol 57/58:49–56
- Doner LW, Hicks KB (1997) Isolation of hemicellulose from corn fiber by alkaline hydrogen peroxide extraction. Cereal Chem 74:176–181
- Draude KM, Kurniawan CB, Duff SJB (2001) Effect of oxygen delignification on the rate and extent of enzymatic hydrolysis of lignocellulosic material. Bioresour Technol 79:113–120
- Duff SJB, Murray WD (1996) Bioconversion of forest products industry waste celluloses to fuel ethanol: a review. Bioresour Technol 55:1–33
- Du Preez JC (1994) Process parameters and environmental factors affecting D-xylose fermentation by yeasts. Enzyme Microb Technol 16:944–956
- Eda S, Ohnishi A, Kato K (1976) Xylan isolated from the stalk of *Nicotiana tabacum*. Agric Biol Chem 40:359–364
- Eklund R, Zacchi G (1995) Simultaneous saccharification and fermentation of steam-pretreated willow. Enzyme Microb Technol 17:255–259
- Eliasson A, Christensson C, Wahborn CF, Hahn-Hagerdahl B (2000) Anaerobic xylose fermentation by recombinant *Saccharomyces cerevisiae* harbouring XYL1, XYL2 and XKS1 in mineral media chemostat cultivations. Appl Environ Microbiol 66:3381–3386
- Faulds CB, Bartolome B, Williamson G (1997) Novel biotransformations of agro-industrial cereal waste by ferulic acid esterases. Ind Crops Prod 6:367–374
- Faveri DD, Perego P, Converti A, Borghi M. (2002) Xylitol recovery by crystallization from synthetic solutions and fermented hemicellulose hydrolyzates. Chem Eng J 90:291–298
- Fernandez-Bolanos J, Felizon B, Heredia A, Rodriguez R, Guillen R, Jimenez A (2001) Steam-explosion of olive stones: hemicellulose solubilization and enhancement of enzymatic hydrolysis of cellulose. Bioresour Technol 79:53–61
- Filho EXF, Touhy MG, Pulls J, Coughlan MP (1991) The xylan-degrading enzyme systems of *Penicillium capsulatum* and *Talaromyces emersonii*. Biochem Soc Trans 19:25S
- Garg SK, Jain A (1995) Fermentative production of 2,3-butanediol. Bioresour Technol 51:103–109

43. Garrote G, Dominguez H, Parajo JC (2001) Generation of xylose solutions from *Eucalyptus globulus* wood by autohydrolysis-posthydrolysis processes: posthydrolysis kinetics. *Bioresour Technol* 79:155–164
44. Gilbert HJ, Hazlewood GP (1993) Bacterial cellulases and xylanases. *J Gen Microbiol* 139:187–194
45. Goldstein IS, Easter JM (1992) An improved process for converting cellulose to ethanol. *Tappi* 75:135–140
46. Gong CS, Chen LF, Flickinger MC, Chiang LC, Tsao GT (1981) Production of ethanol from D-xylose by using D-xylose isomerase and yeasts. *Appl Environ Microbiol* 41:430–436
47. Gong CS, Cao N, Tsao GT (1997) Biological production of 2,3-butanediol from renewable biomass. In: Saha BC, Woodward J (eds) *Fuels and chemicals from biomass*. American Chemical Society, Washington, D.C., pp 280–293
48. Gould JM (1984) Alkaline peroxide delignification of agricultural residues to enhance enzymatic saccharification. *Biotechnol Bioeng* 26:46–52
49. Govinden R, Pillay B, van Zyl WH, Pillay D (2001) Xylitol production by recombinant *Saccharomyces cerevisiae* expressing the *Pichia stipitis* and *Candida shehatei* *XYL1* genes. *Appl Microbiol Biotechnol* 55:76–80
50. Granstorm T, Ojama H, Leisola M (2001) Chemostat study of xylitol production by *Candida guilliermondii*. *Appl Microbiol Biotechnol* 55:36–42
51. Gruppen H, Hamer RJ, Voragen AGJ (1992) Water-unextractable cell wall material from wheat flour. 2. Fractionation of alkali-extracted polymers and comparison with water-extractable arabinoxylans. *J Cereal Sci* 16:53–67
52. Gurgel PV, Manchilha IM, Pecanha RP, Siqueira JFM (1995) Xylitol recovery from fermented sugarcane bagasse hydrolyzate. *Bioresour Technol* 52:219–223
53. Hahn-Hagerdal B, Berner S, Skoog K (1986) Improved ethanol production from xylose with glucose isomerase and *Saccharomyces cerevisiae* using respiratory inhibitor azide. *Appl Microbiol Biotechnol* 24:287–293
54. Hahn-Hagerdal B, Jeppsson H, Skoog K, Prior BA (1994) Biochemistry and physiology of xylose fermentation by yeasts. *Enzyme Microb Technol* 16:933–943
55. Hahn-Hagerdal B, Wahlbom CF, Gardonyi M, van Zyl WH, Cordero Otero RR, Jonsson LJ (2001) Metabolic engineering of *Saccharomyces cerevisiae* for xylose utilization. *Adv Biochem Eng Biotechnol* 73:53–84
56. Hallborn J, Walfridsson M, Airaksine U, Ojama H, Hahn-Hagerdal B (1991) Xylitol production by recombinant *Saccharomyces cerevisiae*. *Biotechnology* 9:1090–1095
57. Hallborn J, Gorwa MF, Meinander N, Penttila M, Keranen S, Hahn-Hagerdal B (1994) The influence of cosubstrate and aeration on xylitol formation by recombinant *Saccharomyces cerevisiae* expressing the *XYL1* gene. *Appl Microbiol Biotechnol* 42:326–333
58. Ho NWY, Chen Z, Brainard AP (1998) Genetically engineered *Saccharomyces* yeast capable of effective cofermentation of glucose and xylose. *Appl Environ Microbiol* 64:1852–1856
59. Hofer M, Betz A, Kotyk A (1971) Metabolism of the obligatory aerobic yeast *Rhodotorula gracilis*. IV. Induction of an enzyme necessary for D-xylose catabolism. *Biochim Biophys Acta* 252:1–12
60. Hood EE, Hood KR, Fritz SE (1991) Hydroxyproline-rich glycoproteins in cell walls of pericarp from maize. *Plant Sci* 79:13–22
61. Ingram LO, Alterhum F, Ohta K, Beall DS (1990) Genetic engineering of *Escherichia coli* and other enterobacteria for ethanol production. In: Pierce GE (ed). *Developments in Industrial Microbiology*, vol 31, pp 21–30
62. Ingram LO, Aldrich HC, Borges ACC, Causey TB, Martinez A, Morales F, Saleh A, Underwood SA, Yomano LP, York SW, Zaldivar J, Zhou S (1999) Enteric bacterial catalysts for fuel ethanol production. *Biotechnol Prog* 15:855–866
63. Jansen NB, Flickinger MC, Tsao GT (1984) Production of 2,3-butanediol from xylose by *Klebsiella oxytoca* ATCC 8724. *Biotechnol Bioeng* 26:362–368
64. Kaar WE, Holtzaple MT (2000) Using lime pretreatment to facilitate the enzymatic hydrolysis of corn stover. *Biomass Bioenergy* 18:189–199
65. Kim KH, Hong J (2001) Supercritical CO₂ pretreatment of lignocellulose enhances enzymatic cellulose hydrolysis. *Bioresour Technol* 77:139–144
66. Kim SY, Oh DK, Kim JH (1999) Evaluation of xylitol production from corn cob hemicellulose hydrolyzate by *Candida parapsilosis*. *Biotechnol Lett* 21:891–895
67. Klinken HB, Ahning BK, Schmidt AS, Thomson AB (2002) Characterization of degradation products from alkaline wet oxidation of wheat straw. *Bioresour Technol* 82:15–26
68. Kormelink FJM, Voragen AG (1993) Degradation of different [(glucurono)arabino]xylans by a combination of purified xylan-degrading enzymes. *Appl Microbiol Biotechnol* 38:688–695
69. Kosaric N, Velikonja J (1995) Liquid and gaseous fuels from biotechnology: challenges and opportunities. *FEMS Microbiol Rev* 16:111–142
70. Kosaric N, Magee RJ, Blaszczyk R (1992) Redox potential measurement for monitoring glucose and xylose conversion by *K. pneumoniae*. *Chem Biochem Eng Q* 6:145–152
71. Koullas DP, Christakopoulos PE, Kekos D, Koukios EG, Macris BJ (1993) Effect of alkali delignification on wheat straw saccharification by *Fusarium oxysporum* cellulases. *Biomass Bioenergy* 4:9–13
72. Kurakake M, Kisaka W, Ouchi K, Komaki T (2001) Pretreatment with ammonia water for enzymatic hydrolysis of corn husk, bagasse, and switchgrass. *Appl Biochem Biotechnol* 90:251–259
73. Laser M, Schulman D, Allen SG, Lichwa J, Antal MJ Jr, Lynd LR (2002) A comparison of liquid hot water and steam pretreatments of sugar cane bagasse for bioconversion to ethanol. *Bioresour Technol* 81:33–44
74. Leathers TD, Dien BS (2000) Xylitol production from corn fiber hydrolyzate by a two-stage fermentation process. *Process Biochem* 35:765–769
75. Leathers TD, Gupta SC (1997) Saccharification of corn fiber using enzymes from *Aureobasidium* sp. strain NRRL Y-2311-1. *Appl Biochem Biotechnol* 59:337–347
76. Lee SF, Forsberg CW (1987) Purification and characterization of an α -L-arabinofuranosidase from *Clostridium acetobutylicum* ATCC 824. *Can J Microbiol* 33:1011–1016
77. Lee WJ, Ryu YW, Seo JH (2000) Characterization of two-substrate fermentation processes for xylitol production using recombinant *Saccharomyces cerevisiae* containing xylose reductase. *Process Biochem* 35:1199–1203
78. Lesage-Meessen L, Delattre M, Haon M, Thibault JF, Colonna Ceccaldi B, Brunerie P, Asther M (1996) Two-step bioconversion process for vanillin production from ferulic acid combining *Aspergillus niger* and *Pycnoporus cinnabarinus*. *J Biotechnol* 50:107–113
79. Maddox IS (1996) Microbial production of 2,3-butanediol. In: Roehr M (ed) *Biotechnology*, vol 6. *Products of primary metabolism*. VCH, Weinheim, pp 269–291
80. Magee RJ, Kosaric N (1987) The microbial production of 2,3-butanediol. *Adv Appl Microbiol* 32:89–161
81. Malaja A, Hamalainen L (1977) Process for making xylitol. US Patent 4,008,285
82. Martinez A, York SW, Yomano LP, Pineda VL, Davis FC, Shelton JC, Ingram LO (1999) Biosynthetic burden and plasmid limit expression of chromosomally integrated heterologous genes (*pdc*, *adhB*) in *Escherichia coli*. *Biotechnol Prog* 15:891–897
83. Mayerhoff ZDVL, Roberto IC, Silva SS (1997) Xylitol production from rice straw hemicellulose hydrolyzate using different yeast strains. *Biotechnol Lett* 5:407–409

84. McMillan JD (1993) Pretreatment of lignocellulosic biomass. In: Himmel ME, Baker JO, Overend RP (eds) Enzymatic conversion of biomass for fuel production. American Chemical Society, Washington, D.C., pp 292–323
85. Meinander N, Hahn-Hagerdal B, Linko M, Linko P, Ojamo H (1994) Fed-batch xylitol production with recombinant XYL-1-expressing *Saccharomyces cerevisiae* using ethanol as a co-substrate. *Appl Microbiol Biotechnol* 42:334–339
86. Moniruzzaman M, Dien BS, Skory CD, Chen ZD, Hespell RB, Ho NWY, Dale BE, Bothast RJ (1997) Fermentation of corn fiber sugars by an engineered xylose utilizing *Saccharomyces* yeast strain. *World J Microbiol Biotechnol* 13:341–346
87. Morjanoff PJ, Gray PP (1987) Optimization of steam explosion as method for increasing susceptibility of sugarcane bagasse to enzymatic saccharification. *Biotechnol Bioeng* 29:733–741
88. Mueller-Hartley I, Hartley RD, Harris PJ, Curzon EH (1986) Linkage of *p*-coumaroyl and feruloyl groups to cell-wall polysaccharides of barley straw. *Carbohydr Res* 148:71–85
89. Nichols NN, Dien BS, Bothast RJ (2001) Use of catabolic repression mutants for fermentation of sugar mixtures to ethanol. *Appl Microbiol Biotechnol* 56:120–125
90. Nidetzky B, Neukauser W, Haltrich D, Kulbe KD (1996) Continuous enzymatic production of xylitol with simultaneous coenzyme regeneration in a charged membrane reactor. *Biotechnol Bioeng* 52:387–396
91. Nissen AM, Anker L, Munk N, Lange NK (1992) Xylanases for the pulp and paper industry. In: Visser J, Beldman G, Kusters-Van Someren MA, Voragen AGJ (eds) Xylans and xylanases. Elsevier, Amsterdam, pp 325–337
92. Nollet V, Preziosi-Belloy L, Navarro JM (1995) The reduction of xylose to xylitol by *Candida guilliermondii* and *Candida parapsilosis*: incidence of oxygen and pH. *Biotechnol Lett* 17:417–422
93. Palmqvist E, Hahn-Hagerdal B (2000) Fermentation of lignocellulosic hydrolyzates. I. Inhibition and detoxification. *Bioresour Technol* 74:17–24
94. Palmqvist E, Hahn-Hagerdal B (2000) Fermentation of lignocellulosic hydrolyzates. II. Inhibitors and mechanism of inhibition. *Bioresour Technol* 74:25–33
95. Parajo JC, Dominguez H, Dominguez JM (1996) Production of xylitol from concentrated wood hydrolyzates by *Debaryomyces hansenii*: effect of the initial cell concentration. *Biotechnol Lett* 18:593–598
96. Parajo JC, Dominguez H, Dominguez JM (1997) Improved xylitol production with *Debaryomyces hansenii* Y-7426 from raw or detoxified wood hydrolyzates. *Enzyme Microb Technol* 21:18–24
97. Persson P, Larsson S, Jonsson LJ, Nilvebrant NO, Sivik B, Munteanu F, Thornby L, Gorton L (2002) Supercritical fluid extraction of a lignocellulosic hydrolyzate of spruce for detoxification and to facilitate analysis of inhibitors. *Biotechnol Bioeng* 79:694–700
98. Pfeifer MJ, Silva SS, Felipe MGA, Roberto IC, Mancilha IM (1996) Effect of culture conditions on xylitol production by *Candida guilliermondii* FTI 20037. *Appl Biochem Biotechnol* 57:58:423–430
99. Poutanen K, Puls J (1989) The xylanolytic enzyme system of *Trichoderma reesei*. In: Lewis G, Paice M (eds) Biogenesis and biodegradation of plant cell wall polymers. American Chemical Society, Washington, D.C., pp 630–640
100. Poutanen K, Tenkanen M, Korte H, Puls J (1991) Accessory enzymes involved in the hydrolysis of xylans. In: Leatham GF, Himmel ME (eds) Enzymes in biomass conversion. American Chemical Society, Washington, D.C., pp 426–436
101. Preziosi-Belloy L, Nollet V, Navarro JM (2000) Xylitol production from aspenwood hemicellulose hydrolyzate by *Candida guilliermondii*. *Biotechnol Lett* 22:239–243
102. Richard P, Putkonen M, Vaananen R, Londesborough J, Penttila M (2002) The missing link in the fungal L-arabinose catabolic pathway: identification of the L-xylulose reductase gene. *Biochemistry* 41:6432–6437
103. Roberto IC, Mancilha IM, Souza CAD, Felipe MGA, Sato S, Castro HFD (1994) Evaluation of rice straw hemicellulose hydrolyzate in the production of xylitol by *Candida guilliermondii*. *Biotechnol Lett* 16:1211–1216
104. Roberto IC, Felipe MGA, Mancilha IM, Vitola M, Sato S, Silva SS (1995) Xylitol production by *Candida guilliermondii* as an approach for the utilization of agroindustrial residues. *Bioresour Technol* 51:255–257
105. Roberto IC, Sato S, Mancilha IM (1996) Effect of inoculum level on xylitol production from rice straw hemicellulose hydrolyzate by *Candida guilliermondii*. *J Ind Microbiol* 16:348–350
106. Roberto IC, Silva SS, Felipe MGA, Mancilha IM, Sato S (1996) Bioconversion of rice straw hemicellulose hydrolyzate for the production of xylitol: effect of pH and nitrogen source. *Appl Biochem Biotechnol* 57:58:339–347
107. Saha BC (2000) α -L-Arabinofuranosidase, biochemistry, molecular biology, and application in biotechnology. *Biotechnol Adv* 18:403–423
108. Saha BC (2001) Xylanase from a newly isolated *Fusarium verticillioides* capable of utilizing corn fiber xylan. *Appl Microbiol Biotechnol* 56:762–766
109. Saha BC (2001) Purification and characterization of an extracellular β -xylosidase from a newly isolated *Fusarium verticillioides*. *J Ind Microbiol Biotechnol* 27:241–245
110. Saha BC (2002) Production, purification and properties of xylanase from a newly isolated *Fusarium proliferatum*. *Process Biochem* 37:1279–1284
111. Saha BC, Bothast RJ (1996) Production of L-arabitol from L-arabinose by *Candida entomaeae* and *Pichia guilliermondii*. *Appl Microbiol Biotechnol* 45:299–306
112. Saha BC, Bothast RJ (1997) Enzymes in lignocellulosic biomass conversion. In: Saha BC, Woodward J (eds) Fuels and chemicals from biomass. American Chemical Society, Washington, D.C., pp 46–56
113. Saha BC, Bothast RJ (1997) Microbial production of xylitol. In: Saha BC, Woodward J (eds) Fuels and chemicals from biomass. American Chemical Society, Washington, D.C., pp 307–319
114. Saha BC, Bothast RJ (1998) Purification and characterization of a novel thermostable α -L-arabinofuranosidase from a color-variant strain of *Aureobasidium pullulans*. *Appl Environ Microbiol* 64:216–220
115. Saha BC, Bothast RJ (1998) Effect of carbon source on production of α -L-arabinofuranosidase by *Aureobasidium pullulans*. *Curr Microbiol* 37:337–340
116. Saha BC, Bothast RJ (1999) Enzymology of xylan degradation. In: Imam SH, Greene RV, Zaidi BR (eds) Biopolymers: utilizing nature's advanced materials. American Chemical Society, Washington, D.C., pp 167–194
117. Saha BC, Bothast RJ (1999) Pretreatment and enzymatic saccharification of corn fiber. *Appl Biochem Biotechnol* 76:65–77
118. Saha BC, Bothast RJ (1999) Production of xylitol by *Candida peltata*. *J Ind Microbiol Biotechnol* 22:633–636
119. Saha BC, Bothast RJ (1999) Production of 2,3-butanediol by a newly isolated *Enterobacter cloacae*. *Appl Microbiol Biotechnol* 52:321–326
120. Saha BC, Dien BS, Bothast RJ (1998) Fuel ethanol production from corn fiber: current status and technical prospects. *Appl Biochem Biotechnol* 70–72:115–125
121. Saulnier L, Thibault JF (1999) Ferulic acid and diferulic acids as components of sugar-beet pectins and maize bran heteroxylans. *J Sci Food Agric* 79:396–402
122. Saulnier L, Marot C, Chanliaud E, Thibault JF (1995) Cell wall polysaccharide interactions in maize bran. *Carbohydr Polymers* 26:279–287
123. Schmidt AS, Thomsen AB (1998) Optimization of wet oxidation pretreatment of wheat straw. *Bioresour Technol* 64:139–151

124. Schneider H, Wang PY, Chan YK, Maleszka R (1981) Conversion of D-xylose into ethanol by the yeast *Pachysolen tannophilus*. *Biotechnol Lett* 3:89-92
125. Sedlak M, Ho NWY (2001) Expression of *E. coli araBAD* operon encoding enzymes for metabolizing L-arabinose in *Saccharomyces cerevisiae*. *Enzyme Microb Technol* 2:16-24
126. Shibuya N, Iwasaki T (1985) Structural features of rice bran hemicellulose. *Phytochemistry* 24:285-289
127. Silva SS, Felipe GA, Mancilha IM (1998) Factors that affect the biosynthesis of xylitol by xylose-fermenting yeasts. A review. *Appl Biochem Biotechnol* 70-72:331-339
128. Sun Y, Cheng J (2002) Hydrolysis of lignocellulosic materials for ethanol production: a review. *Bioresour Technol* 83:1-11
129. Syu MJ (2001) Biological production of 2,3-butanediol. *Appl Microbiol Biotechnol* 55:10-18
130. Thomson JA (1993) Molecular biology of xylan degradation. *FEMS Microbiol Rev* 104:65-92
131. Timell TE (1967) Recent progress in the chemistry of wood hemicelluloses. *Wood Sci Technol* 1:45-70
132. Tran AV, Chambers RP (1987) The dehydration of fermentative 2,3-butanediol into methyl ethyl ketone. *Biotechnol Bioeng* 29:343-351
133. Van Dijken JP, Scheffers WA (1986) Redox balances in the metabolism of sugars by yeasts. *FEMS Microbiol Rev* 32:199-224
134. Viikari L, Tenkanen M, Buchert J, Ratto M, Bailey M, Siikaho M, Linko M (1993) Hemicellulases for industrial applications. In: Saddler JN (ed) *Bioconversion of forest and agricultural plant residues*. CAB, Oxford, pp 131-182
135. Viikari L, Kantelinen A, Sundquist J, Linko M (1994) Xylanases in bleaching: from an idea to the industry. *FEMS Microbiol Rev* 13:335-350
136. Wang PY, Shopsis C, Schneider H (1980) Fermentation of a pentose by yeasts. *Biochem Biophys Res Commun* 94:248-254
137. Weil J, Westgate P, Kohlmann K, Ladisch MR (1994) Cellulose pretreatments of lignocellulosic substrates. *Enzyme Microb Technol* 16:1002-1004
138. Winkelhausen E, Kuzmanova S (1998) Microbial conversion of D-xylose to xylitol. *J Ferment Bioeng* 86:1-14
139. Wong KKY, Tan LUL, Saddler JN (1988) Multiplicity of β -1,4-xylanase in microorganisms: functions and applications. *Microbiol Rev* 52:305-317
140. Wyman CE (1994) Alternative fuels from biomass and their impact on carbon dioxide accumulation. *Appl Biochem Biotechnol* 45/46:897-915
141. Wyman CE (1994) Ethanol from lignocellulosic biomass: technology, economics, and opportunities. *Bioresour Technol* 50:3-16
142. Yomano LP, York SW, Ingram LO (1998) Isolation and characterization of ethanol tolerant mutants of *Escherichia coli* KO11 for fuel ethanol production. *J Ind Microbiol* 20:132-138
143. Yu EKC, Saddler JN (1985) Biomass conversion to butanediol by simultaneous saccharification and fermentation. *Trends Biotechnol* 3:100-104
144. Zeikus JG, Lee C, Lee YE, Saha BC (1991) Thermostable saccharidases: new sources, uses, and biodesign. In: Leatham GF, Himmel ME (eds) *Enzymes in biomass conversion*. American Chemical Society, Washington, D.C., pp 36-51
145. Zhang M, Eddy C, Deanda K, Finkelstein M, Picataggio M (1995) Metabolic engineering of a pentose metabolism pathway in ethanologenic *Zymomonas mobilis*. *Science* 267:240-243
146. Zhang M, Chou Y, Picataggio S, Finklestein M (1998) *Zymomonas mobilis* strain for xylose utilization and arabinose fermentation. US Patent 5,843, 760
147. Zheng Y, Lin HM, Wen J, Cao N, Yu X, Tsao GT (1995) Supercritical carbon dioxide explosion as a pretreatment for cellulose hydrolysis. *Biotechnol Lett* 17:845-850
148. Zheng YZ, Lin HM, Tsao GT (1998) Pretreatment of cellulose hydrolysis by carbon dioxide explosion. *Biotechnol Prog* 14:890-896

Supplied by the
U.S. Dept. of Agriculture
National Center for Agricultural
Utilization Research, Peoria, IL